

# Introduction to Cryptocurrencies

CMSC 23200/33200, Winter 2020

---

David Cash and Blase Ur

University of Chicago

# This Lecture: Blockchains and Cryptocurrencies

1. How blockchains like Bitcoin work
2. Security of cryptocurrencies
3. Privacy of cryptocurrencies
4. Who benefits? Who is harmed?

# The Bitcoin Story

- 2008: An anonymous paper and prototype posted
- 2008-2017: Bitcoin grows in popularity and price
- 2017-2018: The world loses its mind

## Bitcoin: A Peer-to-Peer Electronic Cash System

Satoshi Nakamoto  
satoshi@gmx.com  
www.bitcoin.org

**Abstract.** A purely peer-to-peer version of electronic cash would allow online payments to be sent directly from one party to another without going through a financial institution. Digital signatures provide part of the solution, but the main benefits are lost if a trusted third party is still required to prevent double-spending. We propose a solution to the double-spending problem using a peer-to-peer network. The network timestamps transactions by hashing them into an ongoing chain of hash-based proof-of-work, forming a record that cannot be changed without redoing the proof-of-work. The longest chain not only serves as proof of the sequence of events witnessed, but proof that it came from the largest pool of CPU power. As long as a majority of CPU power is controlled by nodes that are not cooperating to attack the network, they'll generate the longest chain and outpace attackers. The network itself requires minimal structure. Messages are broadcast on a best effort basis, and nodes can leave and rejoin the network at will, accepting the longest proof-of-work chain as proof of what happened while they were gone.

# Bitcoin Price (in USD) Over Time



# Hundreds of Altcoins Today





# Early Cryptocurrency: ECash

## BLIND SIGNATURES FOR UNTRACEABLE PAYMENTS

David Chaum

Department of Computer Science  
University of California  
Santa Barbara, CA

### INTRODUCTION

Automation of the way we pay for goods and services is already underway, as can be seen by the variety and growth of electronic banking services available to consumers. The ultimate structure of the new electronic payments system may have a substantial impact on personal privacy as well as on the nature and extent of criminal use of payments. Ideally, a new payments system should address both of

STEVEN LEVY BUSINESS 12.01.94 12:00 PM

## E-MONEY (THAT'S WHAT I WANT)

---

SHARE

---



92

The killer application for electronic networks isn't video-on-demand. It's going to hit you where it really matters - in your wallet. It's not only going to revolutionize the Net, it will change the global economy.

# DigiCash Inc and ECash's Rise and Fall in the 1990s

## Attention Internet Shoppers: E-Cash Is Here

By PETER H. LEWIS

Special to The New York Times

CHICAGO, Oct. 18 — The first trials of an international electronic cash system will begin on Wednesday, with a bankroll of one million "cyber bucks" and several hundred volunteers eager to spend them, the system's developer said today.

Digicash Inc., which has offices in Menlo Park, Calif., and Amsterdam, hopes to establish its system as a standard for commercial transactions on the Internet, a global computer network that links millions of users. If the system proves workable in the trials, it is expected to begin commercial operations within months.

The development of an electronic cash system, which eventually would allow buyers and sellers to conduct commercial transactions entirely within the part of cyberspace known as the World Wide Web, is considered critical to the continued business growth of the Internet.

Using credit cards or other means of conventional currency transfer, a consumer would transfer a given amount of E-cash, as electronic cash is rapidly coming to be known, to his or her computer. Then, while shop-

## Self-Service Air

By Bloomberg Business News

DAYTON, Ohio, Oct. 18 — AT&T Global Information Solutions and the Datamax Corporation have introduced self-service ticketing kiosks that allow travelers to get their tickets and boarding passes without

ping find could scre seller T mat to v How prot muc the A alre a lin the tion vent tabl cash tem cros ban spor cum " cont com er p Inte Se pose mor ing ogie of r

703 views | Nov 1, 1999, 12:00am

## Requiem for a Bright Idea



Julie Pitta BRANDVOICE AdVoice ⓘ

DAVID CHAUM SAVORED HIS first taste of success two years ago. A brilliant scientist whose specialty is cryptology, he started DigiCash in 1989 to create an on-line currency as secure and private as cash in the physical world. By 1997 he had lured venture backing, snagged the celebrated guru Nicholas Negroponte as chairman and signed a St. Louis bank as his first client. If the cashless society was imminent, he would be among the chief beneficiaries.

Today DigiCash is dead, and Cha to get enough merchants to acc to use it, or vice versa," he says.

Stell

Airlines could shave 5 percent to 15 percent from the cost of each ticket by using the kiosks, Mr. Stellweg said.

To use the system, a customer would make travel arrangements as usual, through travel agents or di-

article you re have, you're it."

Mr. Chaum tion that E-c nymity might the Internet

*"As the Web grew, the average level of sophistication of users dropped. It was hard to explain the importance of privacy to them."*

*— David Chaum, 1999*

(1994)

# A Proto-Bitcoin: DCash, The Desert Island Currency





# A Proto-Bitcoin: DCash, The Desert Island Currency

**Initialization**: Ben, Blase, and David all get 5 DCash coins

TranID	From	To	Amount
1	Ben	Blase	1
2	David	Blase	2
3	Ben	David	3
4	Blase	David	6
5	Ben	David	2
...	...	...	...



Transaction history implicitly represents how much money each person has.

# Another Threat: Ledger Integrity Violations



TranID	From	To	Amount
1	Ben	Blase	1
2	David	Blase	2
<del>3</del>	<del>Ben</del>	<del>David</del>	<del>3</del>
4	Blase	David	6
5	Ben	David	1
6	David	Ben	8

Adding/deleting unauthorized transactions amounts to stealing money.



# Minting DCash

New DCash coins created via transactions with blank "From:"

TranID	From	To	Amount
1	Ben	Blase	1
2	David	Blase	2
3	Ben	David	3
4	Blase	David	6
5	Ben	David	1
6		Ben	1

Total supply of coins increases!

# Refresher: Digital Signatures

**Definition.** A digital signature scheme consists of three algorithms **Kg**, **Sign**, and **Verify**

- Key generation algorithm **Kg**, takes no input and outputs a (random) public-verification-key/secret-signing key pair  $(VK, SK)$
- Signing algorithm **Sign**, takes input the secret key  $SK$  and a message  $M$ , outputs “signature”  $\sigma \leftarrow \text{Sign}(SK, M)$
- Verification algorithm **Verify**, takes input the public key  $VK$ , a message  $M$ , a signature  $\sigma$ , and outputs **ACCEPT/REJECT**  
 $\text{Verify}(VK, M, \sigma) = \text{ACCEPT/REJECT}$



# Digital Signatures for More Secure & Private Ledgers

**Initialization:** Ben, Blase, and David all generate keys for digital signatures

David's verification key:  $VK_{\text{david}} = 5e7843\dots$

Ben's verification key:  $VK_{\text{ben}} = 88f01e\dots$

Blase's verification key:  $VK_{\text{blase}} = 16823a\dots$

Ben signs  
transaction row

TranID	From	To	Amount	Signature
1	88f01e...	16823a...	1	91a001...
2	5e7843...	16823a...	2	2c3118...
3	88f01e...	5e7843...	3	7623a6...
4	16823a...	5e7843...	6	987234...
5	88f01e...	5e7843...	1	234b98...

# Digital Signatures for More Secure & Private Ledgers

**Initialization:** Ben, Blase, and David all generate keys for digital signatures

David's verification key:  $VK_{\text{david}} = 5e7843\dots$

Ben's verification key:  $VK_{\text{ben}} = 88f01e\dots$

Blase's verification key:  $VK_{\text{blase}} = 16823a\dots$

David signs transaction row, *plus* entire history (prevents reordering)

TranID		From	To	Amount	
1		88f01e...	16823a...	1	912001...
2		5e7843...	16823a...	2	2c3118...
3		88f01e...	5e7843...	3	7623a6...
4		16823a...	5e7843...	6	987234...
5		88f01e...	5e7843...	1	234b98...

# Digital Signatures for More Secure & Private Ledgers

**Initialization:** Ben, Blase, and David all generate keys for digital signatures

David's verification key:  $VK_{\text{david}} = 5e7843...$

Ben's verification key:  $VK_{\text{ben}} = 88f01e...$


Blase's verification key:  $VK_{\text{blase}} = 16823a...$

TranID	From	To	Amount	Signature
1	88f01e...	16823a...	1	91a001...
2	5e7843...	16823a...	2	2c3118...
3	88f01e...	5e7843...	3	7623a6...
4	16823a...	5e7843...	6	987234...
5	88f01e...	5e7843...	1	234b98...

- Transactions can be added by anyone since signatures can be checked
- Anonymous... sort of

# Tool for Distributed Ledgers: Blockchains


- Suppose <data> are divided in blocks

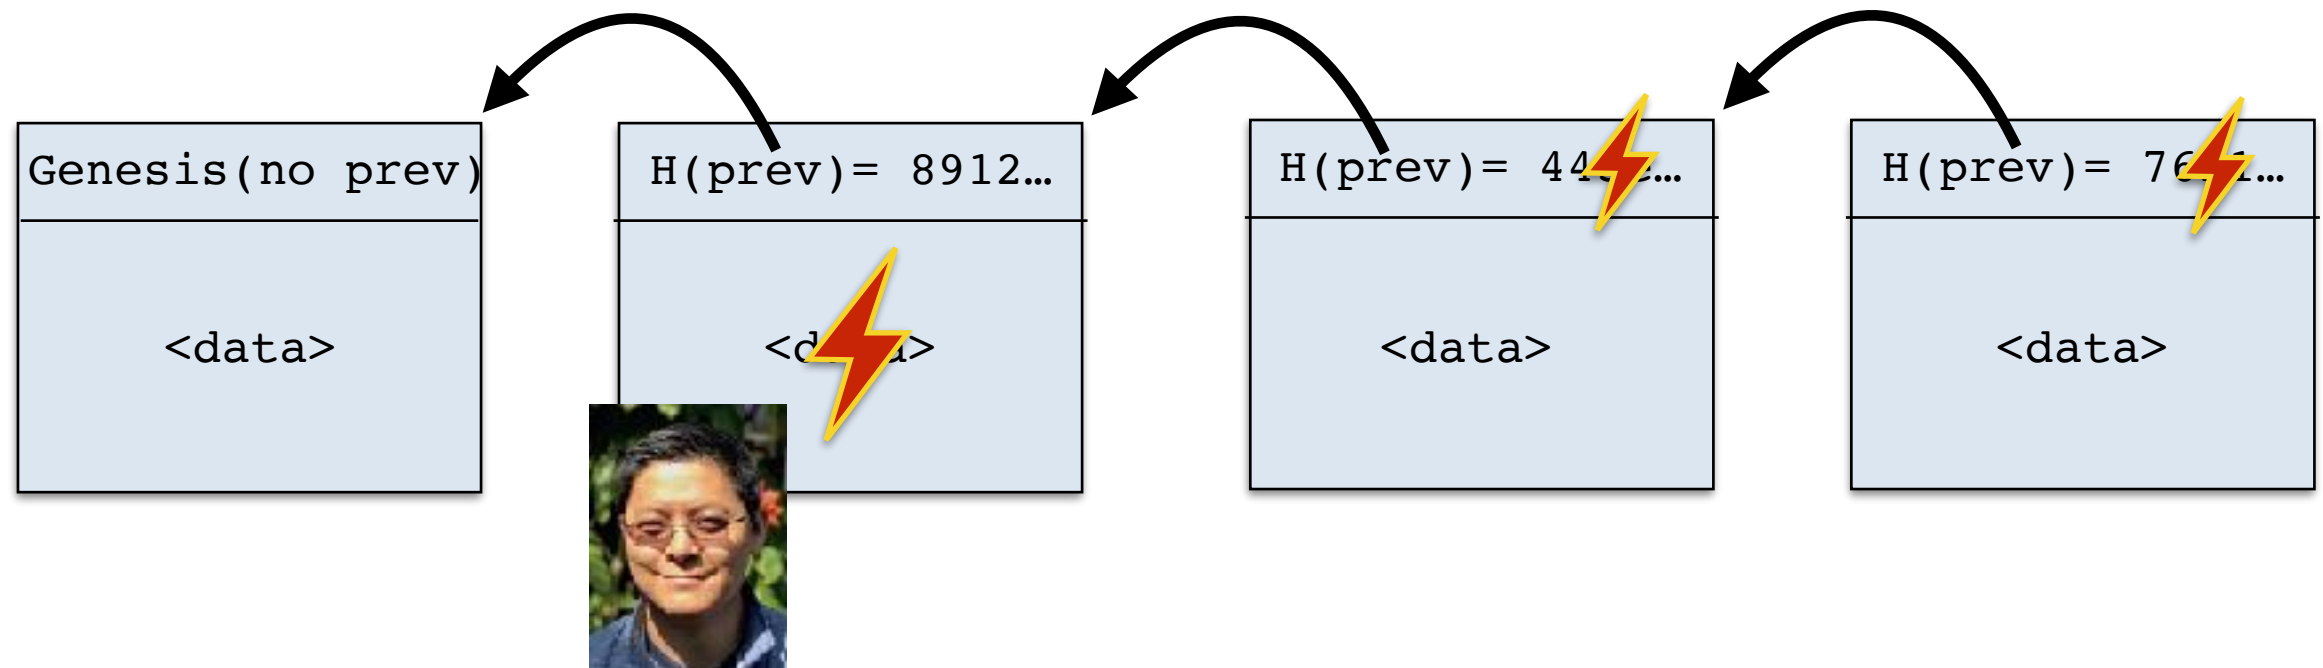

- Can add blocks easily — Just hash prev.
- If we know the last hash (7612...) then we can if data was changed in any prior block.
- Additionally, blockchains cure cancer, end all wars, feed the hungry, etc



# Moving DCCash “To the Blockchain”: Block Data Format

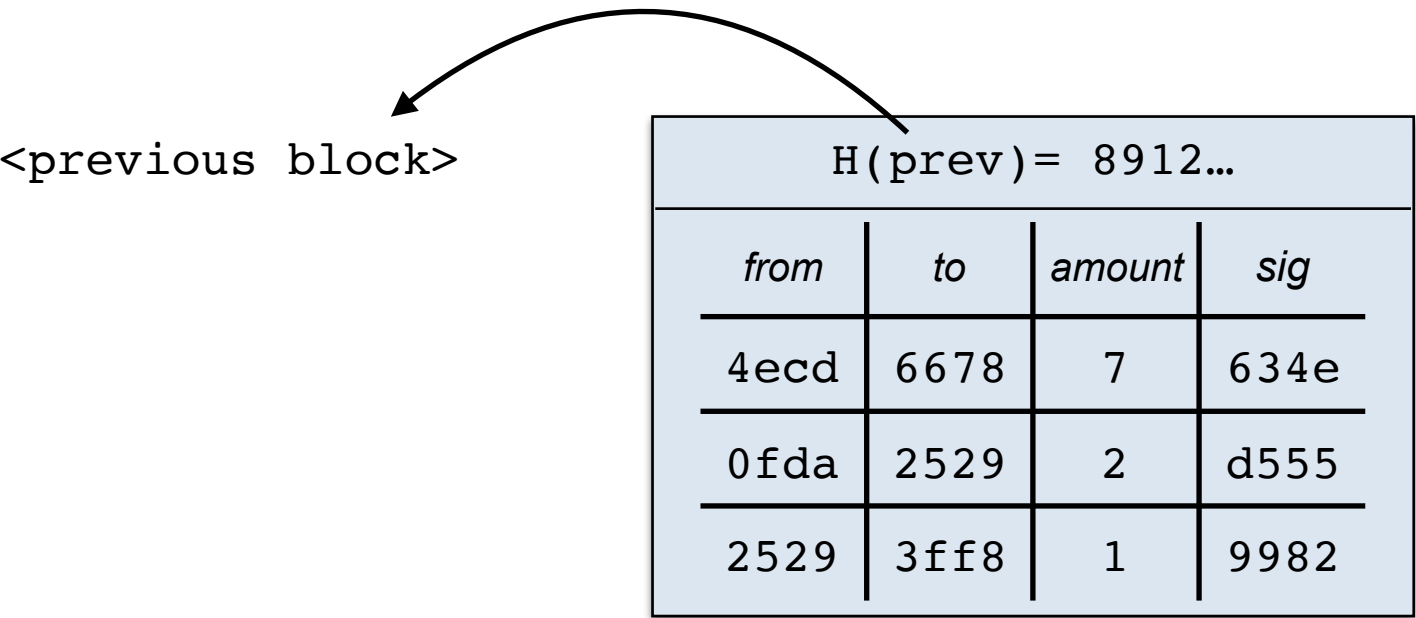


# Moving DCash “To the Blockchain”: The Details

## Initialization:

- Step one: Choose an authority to manage chain. I choose me.
- Step two: Create genesis block that creates coins via sender-less transactions

## Operation thereafter:


- Everyone sends signed transactions to authority, until block is full
- When block is full, authority publishes next block
- Everyone can check validity of transactions (signed + account balances)

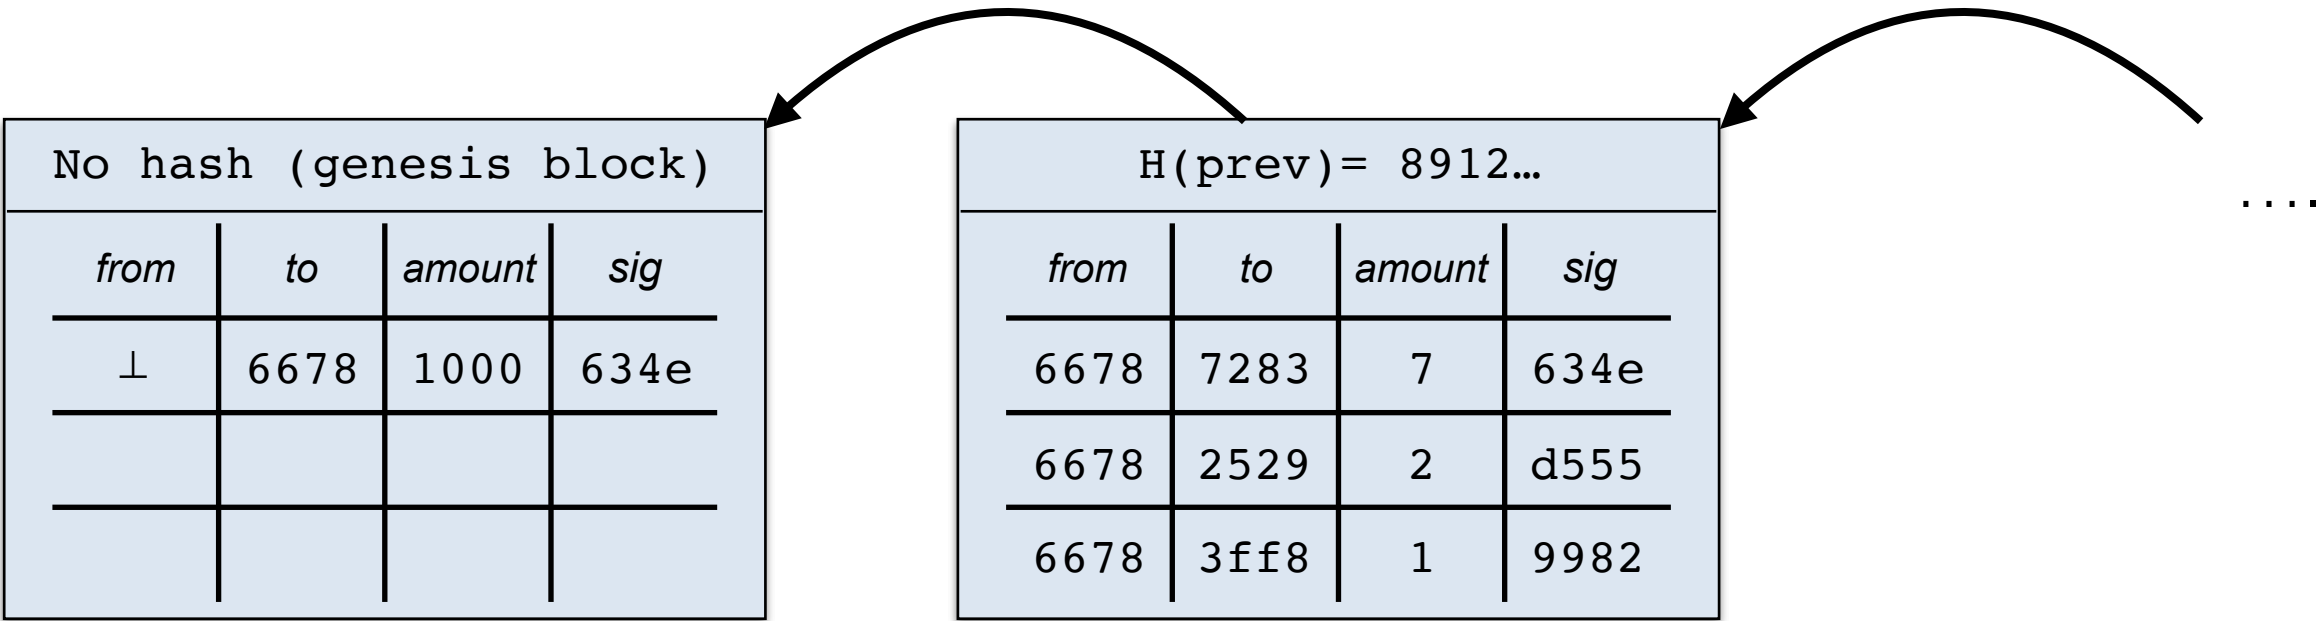

# DCash with an Angel instead of an Authority

Hypothetical operation:

- Everyone broadcasts signed transactions to P2P network, which rebroadcasts
- Every so often, an angel randomly picks someone to be leader for the block
- That leader adds block (decides which transactions are included)
- Everyone checks validity of new block of transactions (signed + acct balances)

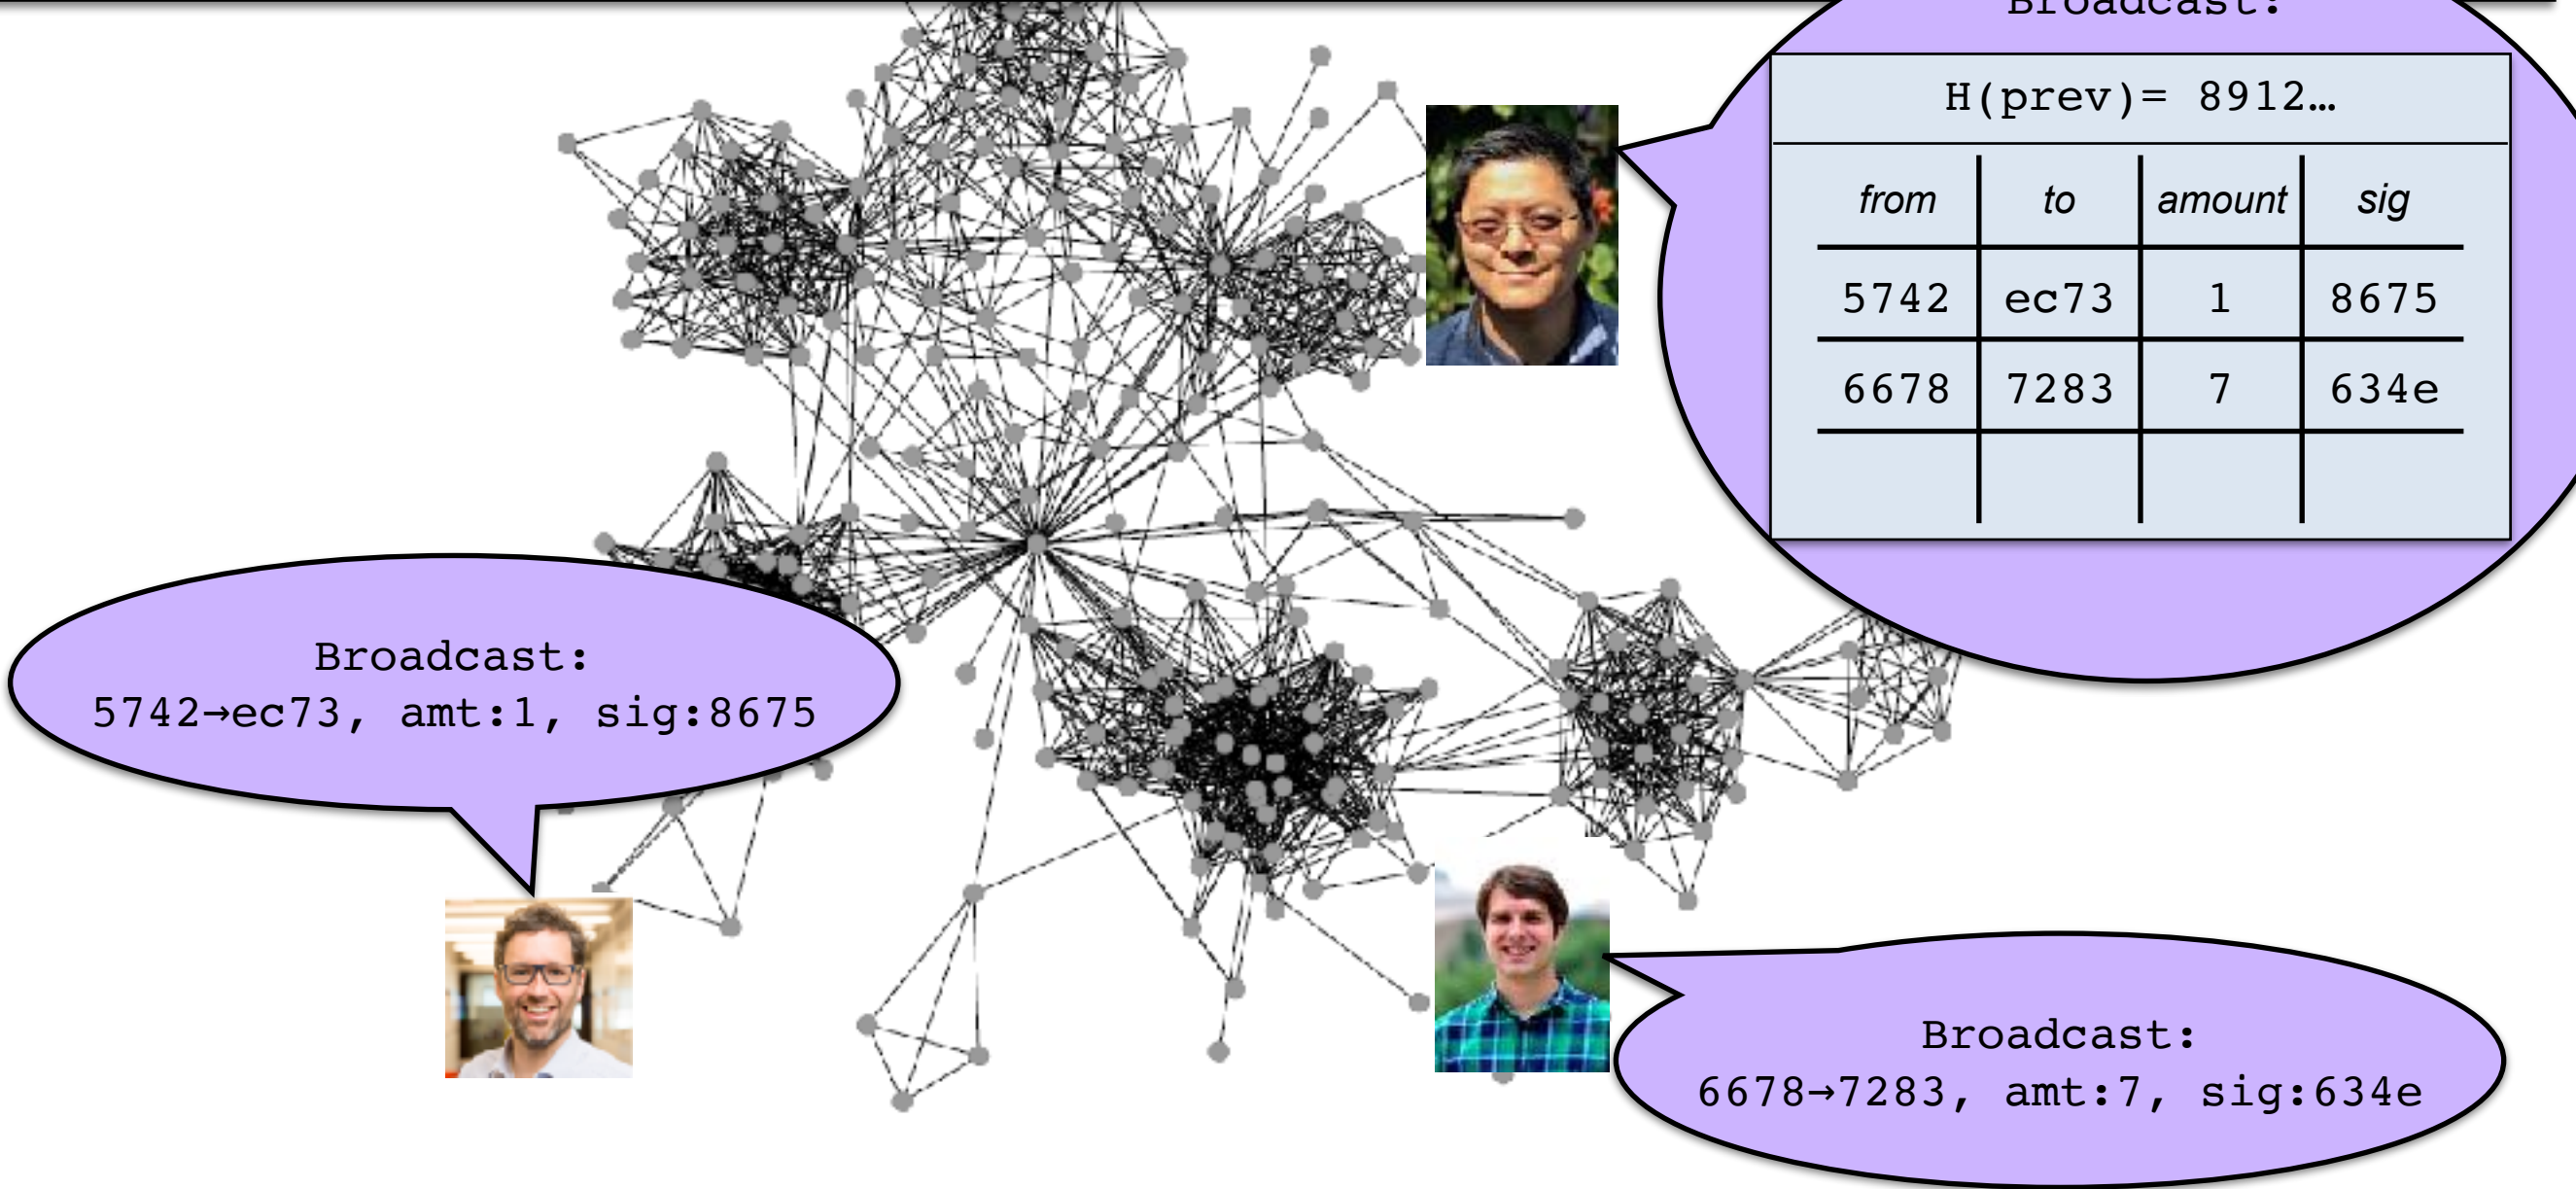

# Tool to Implement the Angel: Proofs of Work

- Proof of Work: A problem that is fairly hard to solve, but not *too* hard.
- Uses a cryptographic hash function  $H$  (e.g. SHA256)

Hardness parameter: Integer  $k$

Input: string  $x$

Output: string  $C$  such that  $H(x, C)$  starts with  $k$  zeros

Canonical algorithm: On input  $x$ :

For  $C = 0, 1, 2, \dots$

    If  $H(x, C)$  starts with  $k$  zeros:


        Output  $C$

- With a secure hash function, best algorithm is the canonical algorithm
- Canonical algorithm evaluates hash  $2^k$  times on average



# Proofs of Work with Blockchains


- Everyone agrees on value of  $h = H(\text{latest-blk})$
- Each person concats  $h$  and their ID to form  $X$ :  $X = h || \text{ID}$
- Each person tries to solve POW with their  $X$
- First to solve is the leader, and adds block

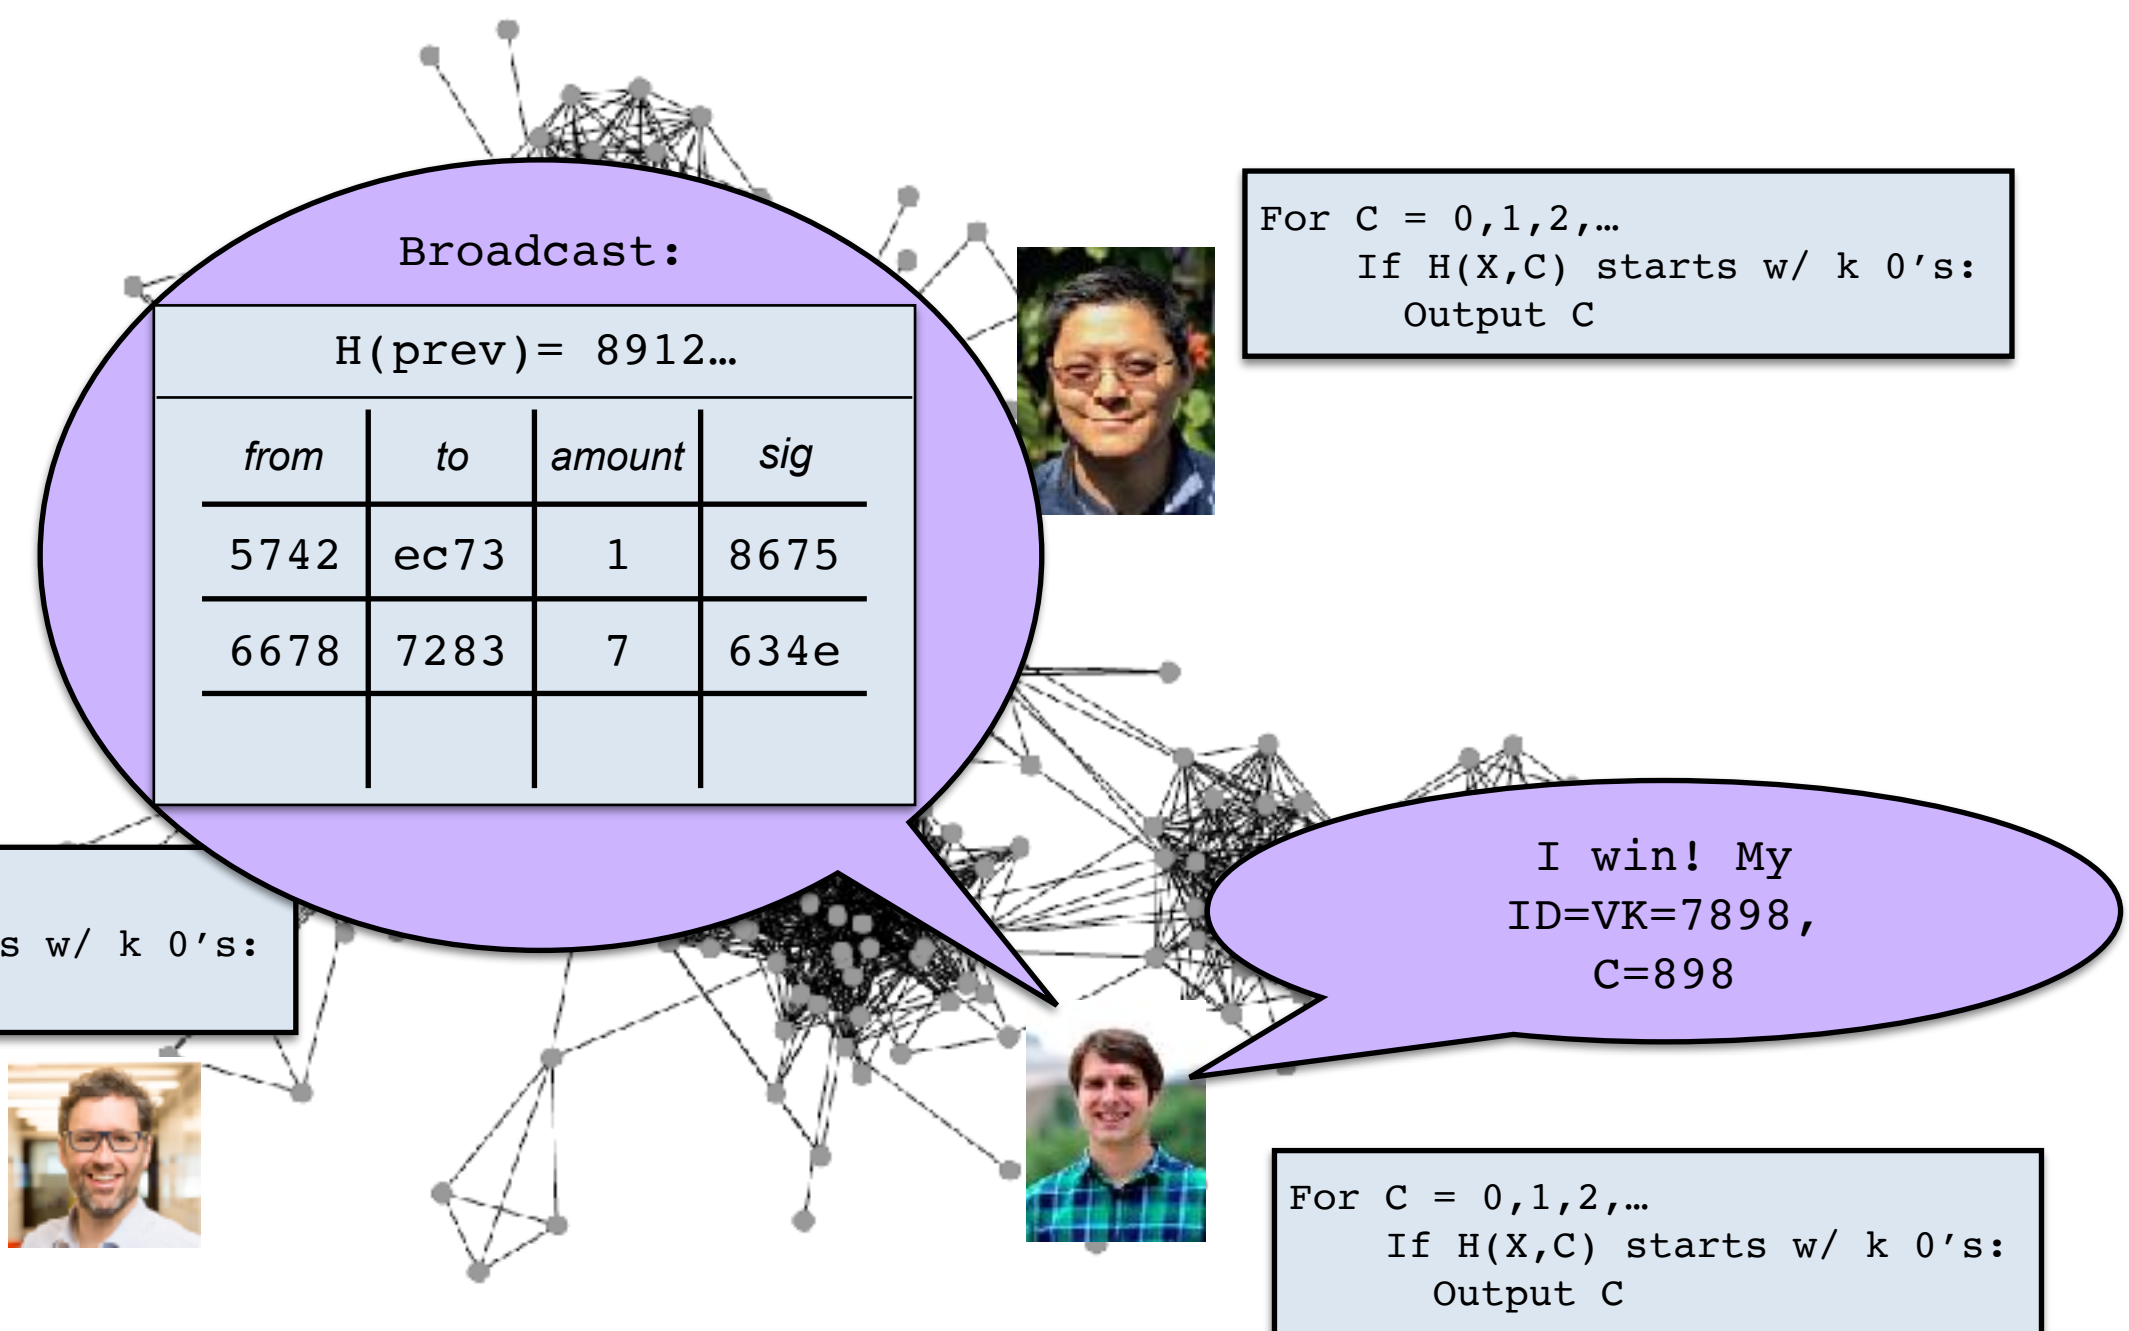

# But why do the POWs?

This POW is slowing down my computer... I'll let the others do the work....

For  $C = 0, 1, 2, \dots$   
If  $H(X, C)$  starts w/  $k$  0's:  
Output  $C$

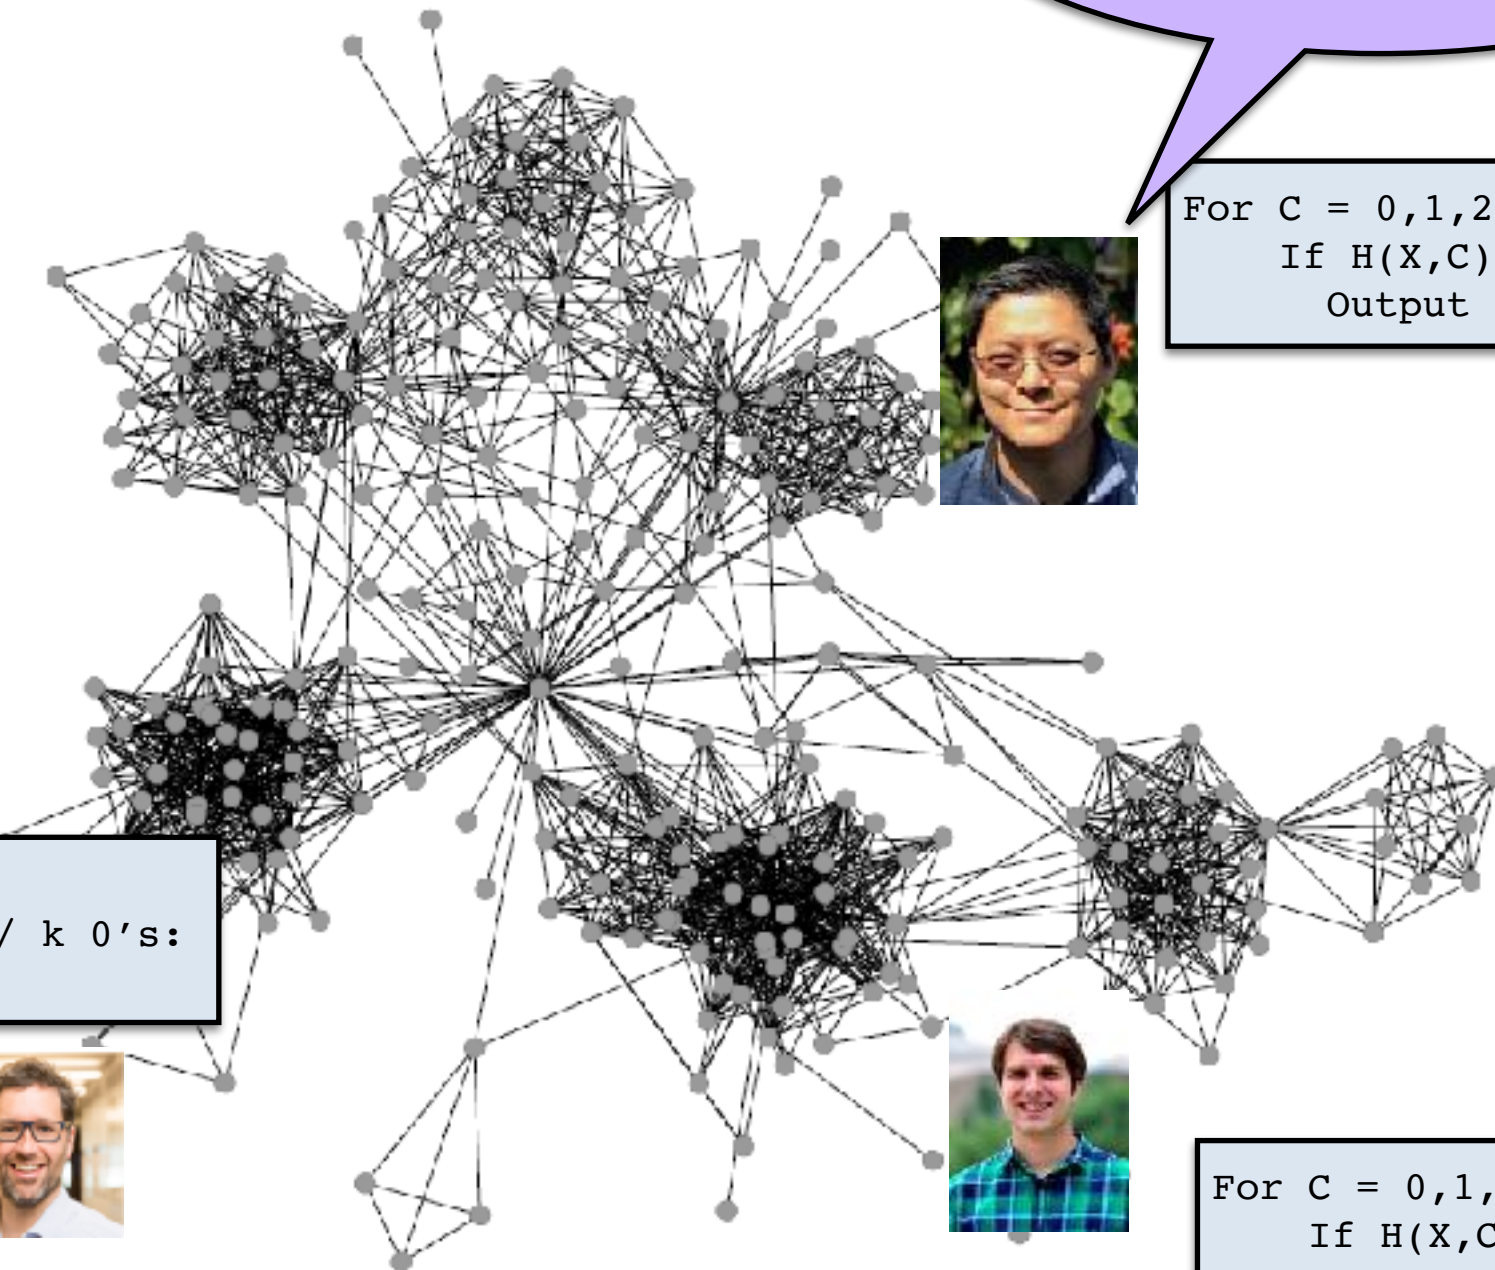

For  $C = 0, 1, 2, \dots$   
If  $H(X, C)$  starts w/  $k$  0's:  
Output  $C$




For  $C = 0, 1, 2, \dots$   
If  $H(X, C)$  starts w/  $k$  0's:  
Output  $C$



# Incentivizing POWs for the Blockchain

- Pay the winner, in the form of newly-minted coins
- This is called “mining”

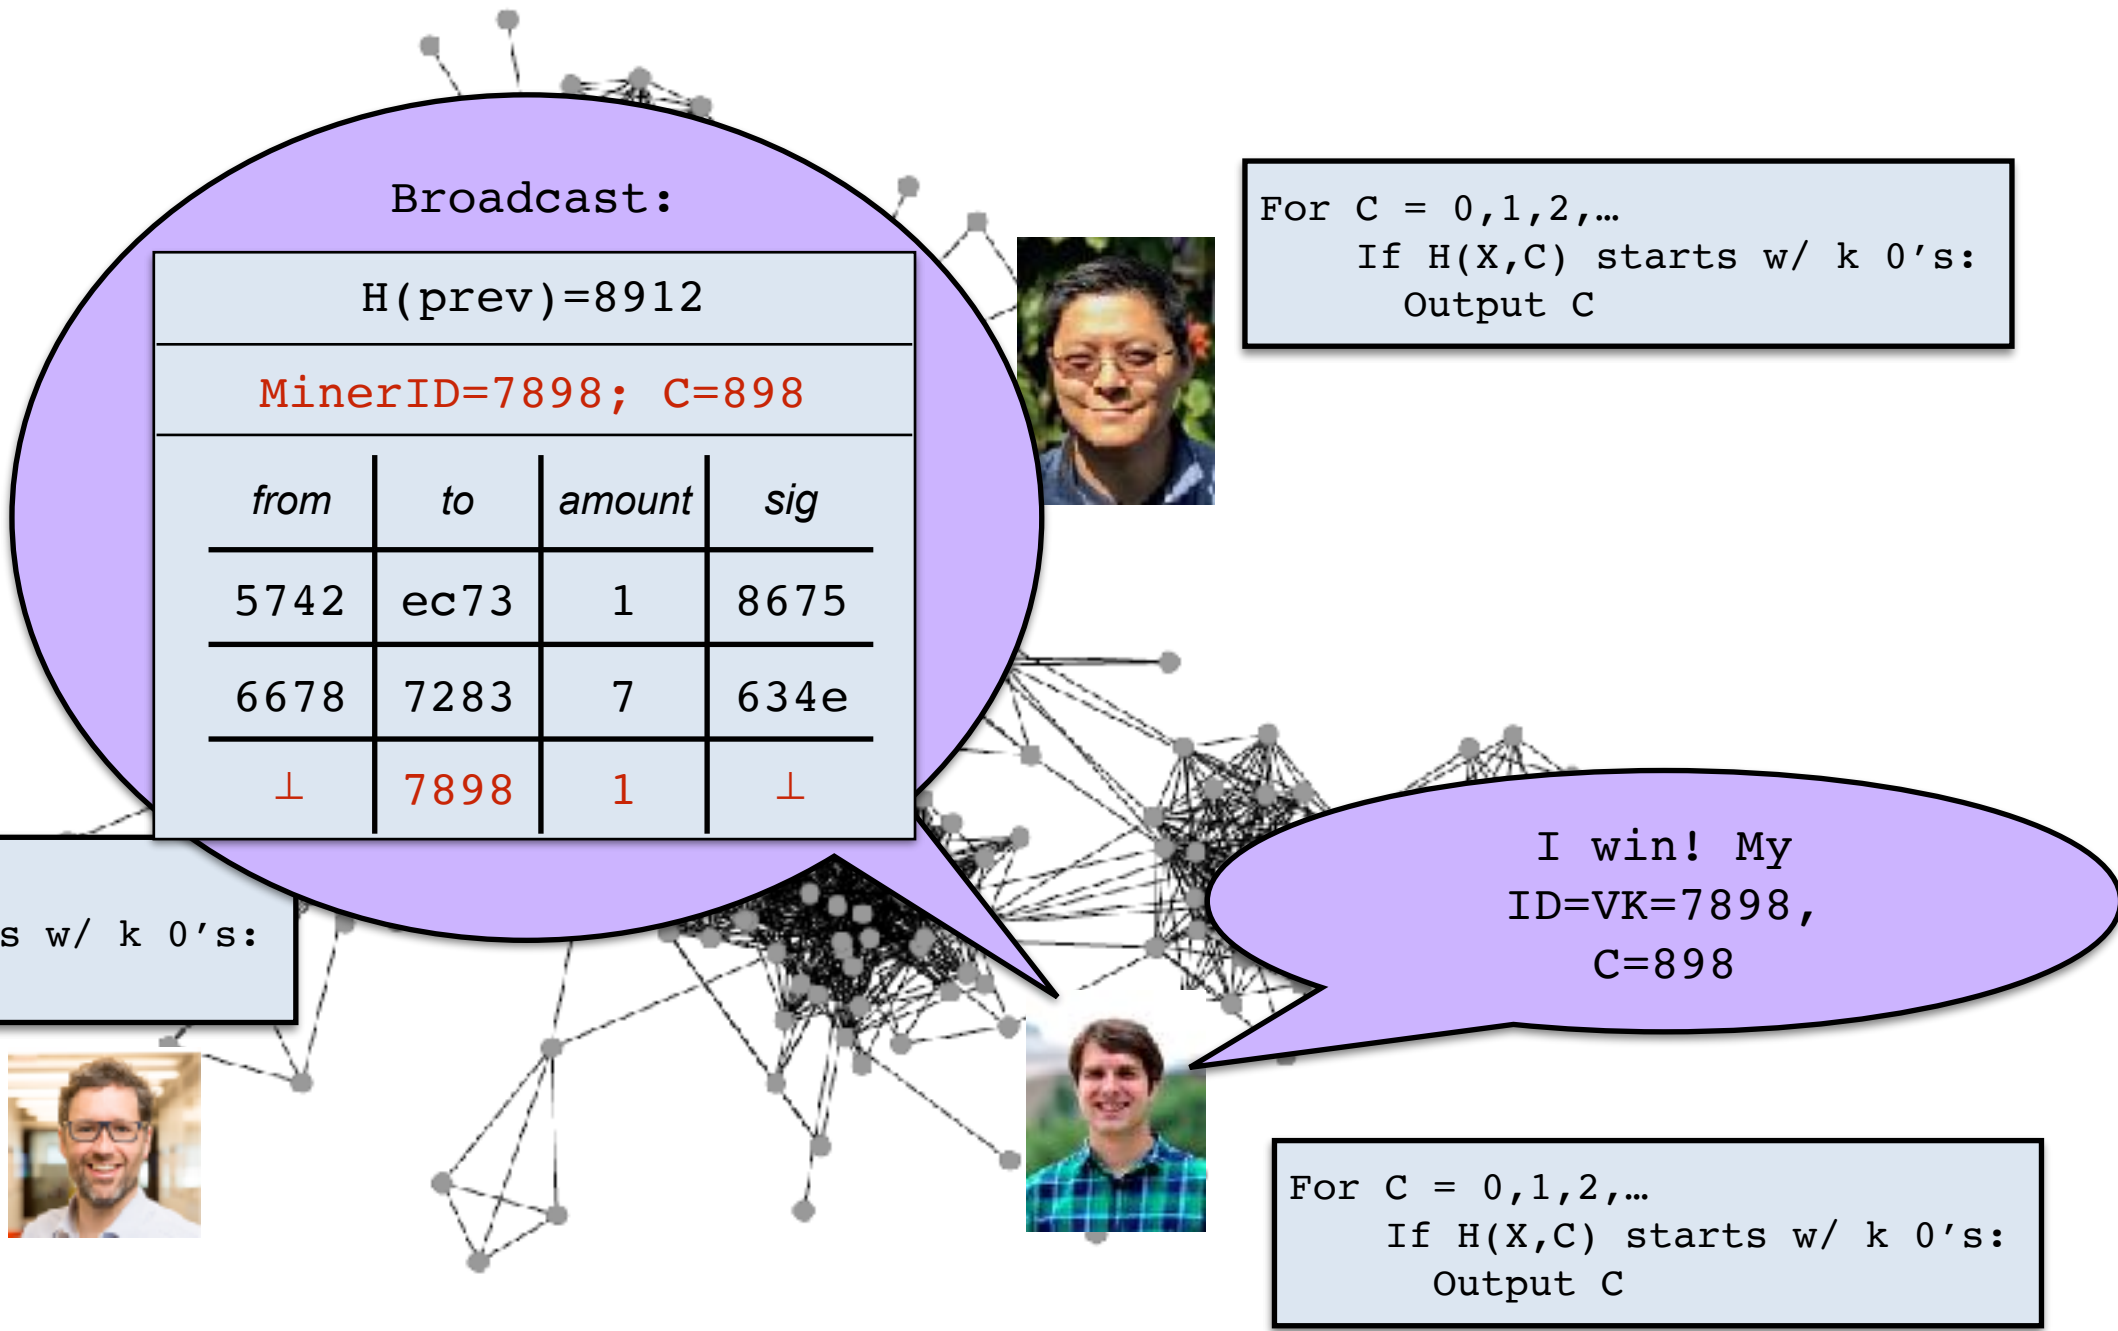

# The DCash Blockchain, So Far

1. Digital version of ledger; Accounts defined by history
2. Genesis block gave chosen group a pile of coins
3. Transactions signed by senders, aggregated into blocks
4. Blocks added by whoever wins POW game
5. Participants incentivized via mining



# Forking in the Blockchain

Broadcast:

H(prev)=8912			
MinerID=fc91; C=771			
from	to	amount	sig
5742	ec73	1	8675
6678	7283	7	634e
⊥	fc91	1	⊥

This is awkward...

Broadcast:

H(prev)=8912			
MinerID=7898; C=898			
from	to	amount	sig
5742	ec73	1	8675
6678	7283	7	634e
⊥	7898	1	⊥

For  $C = 0, 1, 2, \dots$   
If  $H(X, C)$  starts w/  $k$   
Output  $C$


I win! My  
ID=VK=fc91,  
C=771

I win! My  
ID=VK=7898,  
C=898

For  $C = 0, 1, 2, \dots$   
If  $H(X, C)$  starts w/  $k$  0's:  
Output  $C$


# Forking in the Blockchain

- Other parties accept whichever block they hear about first
- ... But parts of the network will accept different blocks

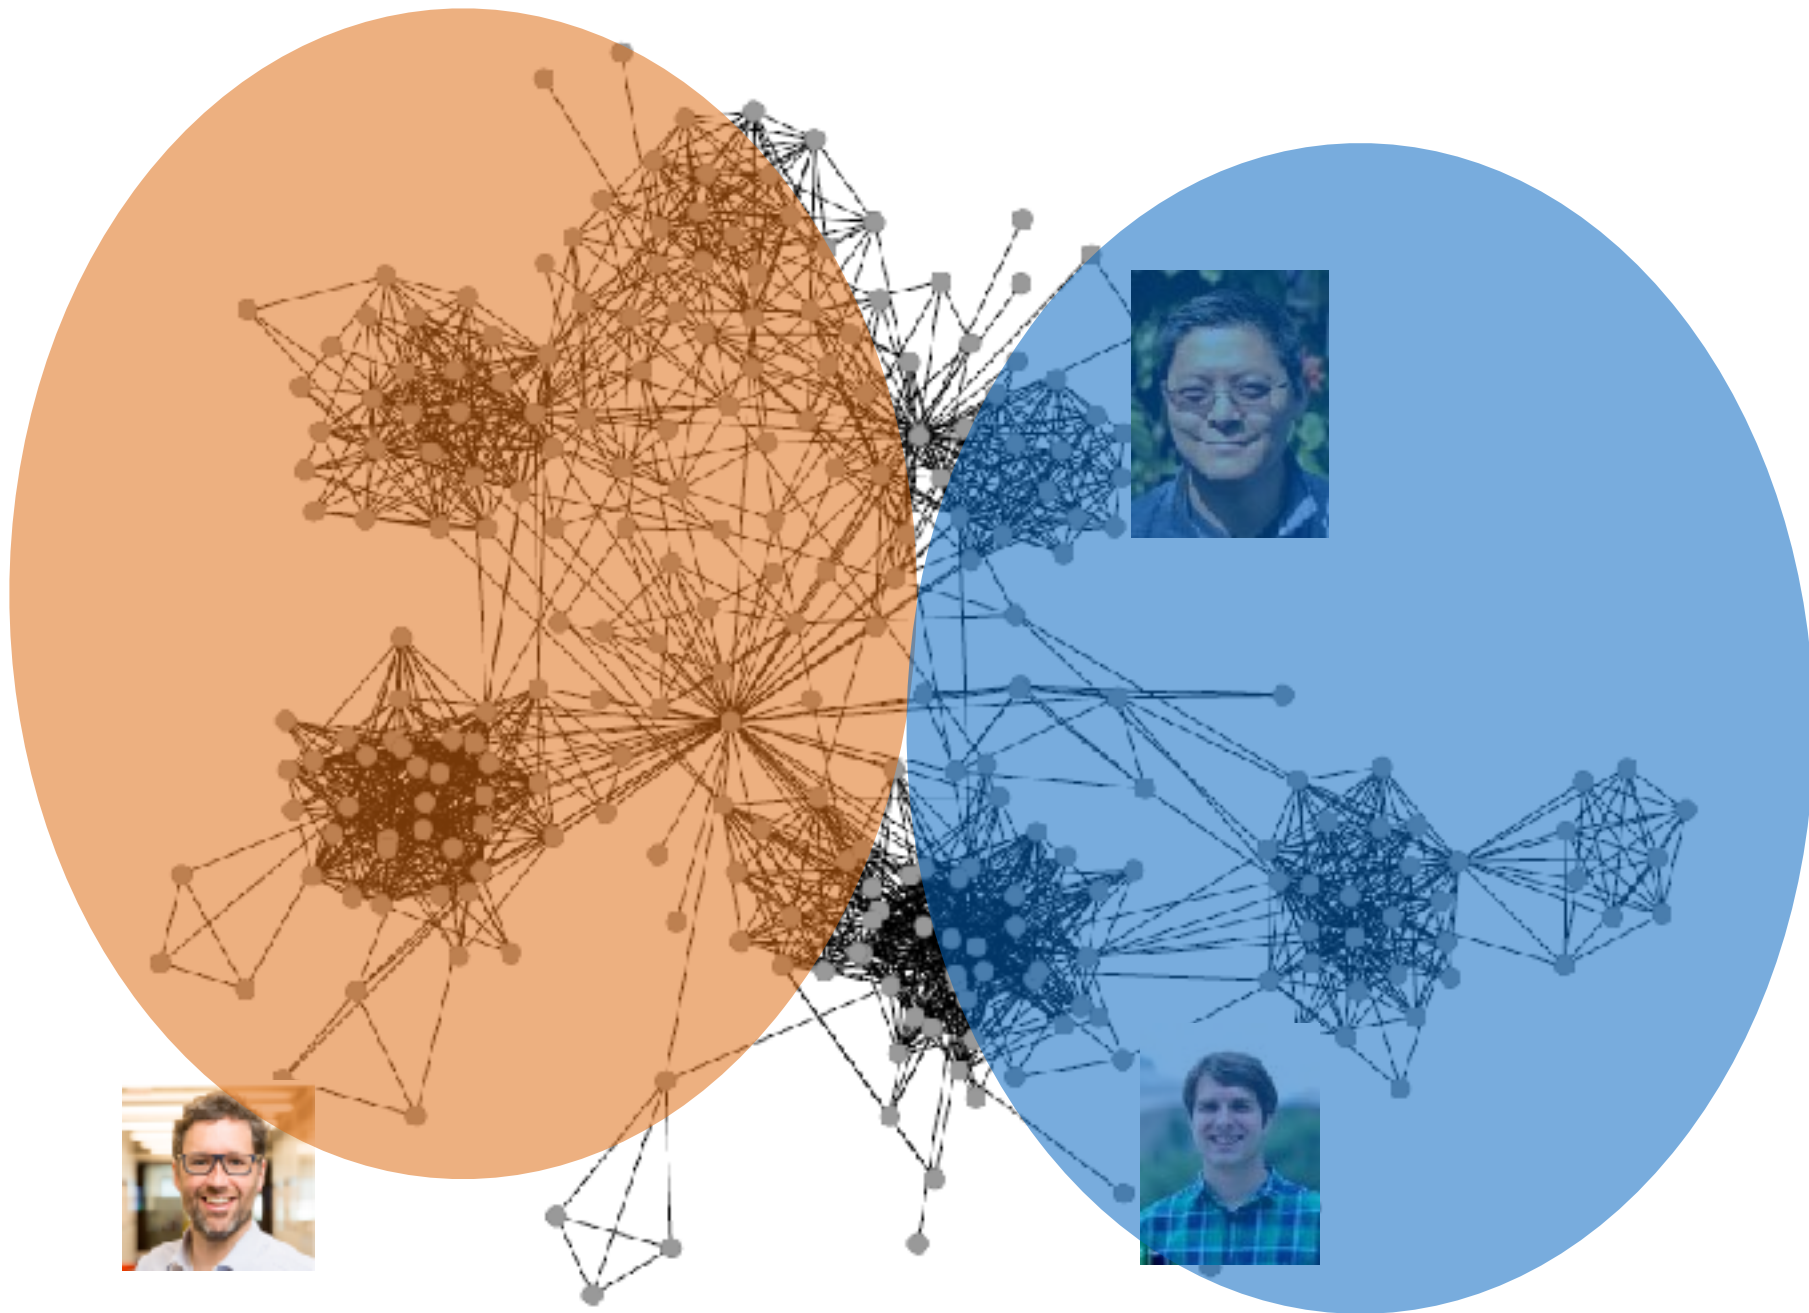

# Forking in the Blockchain

- Blockchain network is in a “forked” state

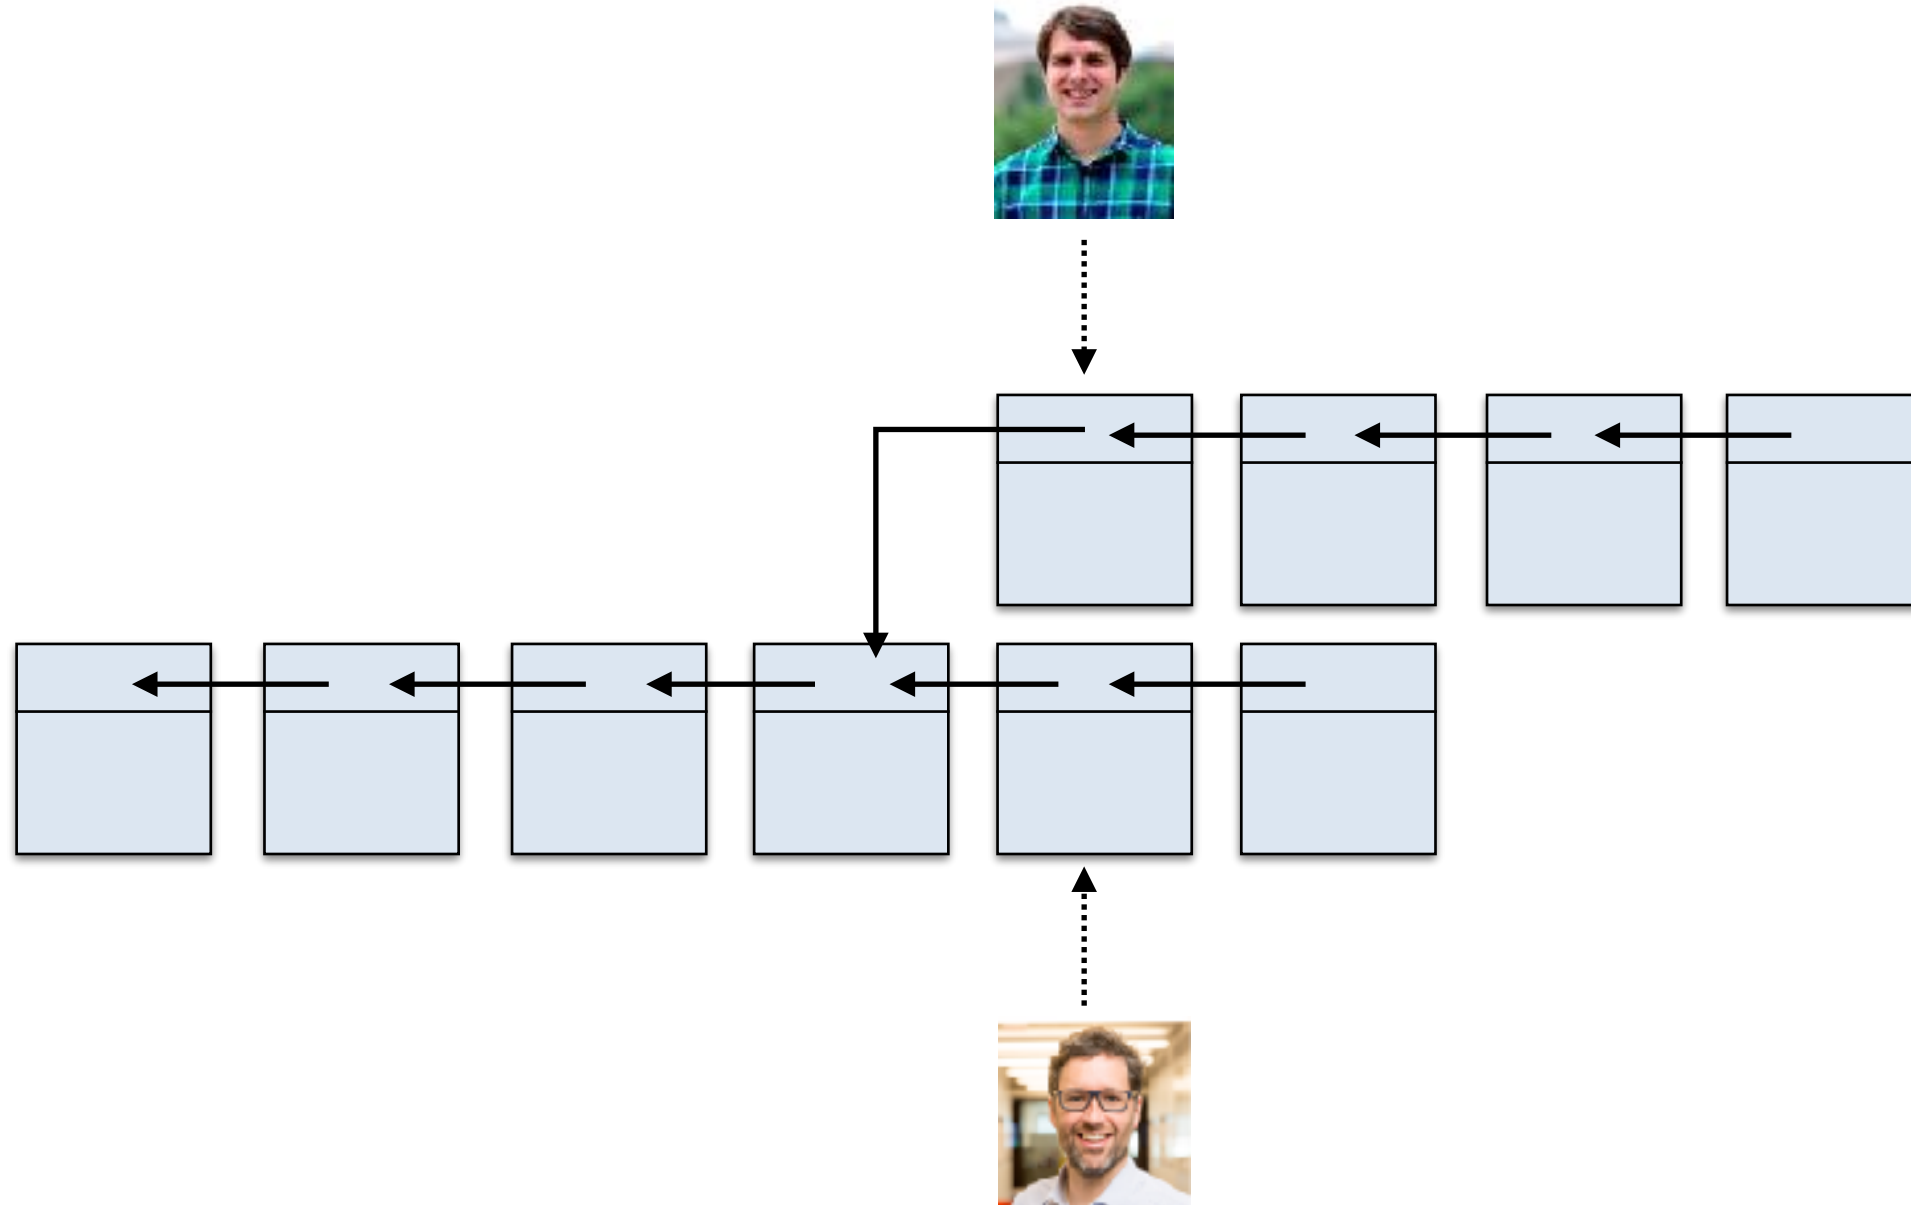


- Resolution: Any node will switch to the longest chain it has seen

# Implication: The Power to Re-write History

- Suppose one party (David) can mine faster than the rest of the network



- Step 1: Buy bananas from Blase on main fork.
- Step 2: Eat bananas.
- Step 3: Mine a fork longer than main fork. Omit banana transaction.
- Step 4: Announce longer fork, switching network.

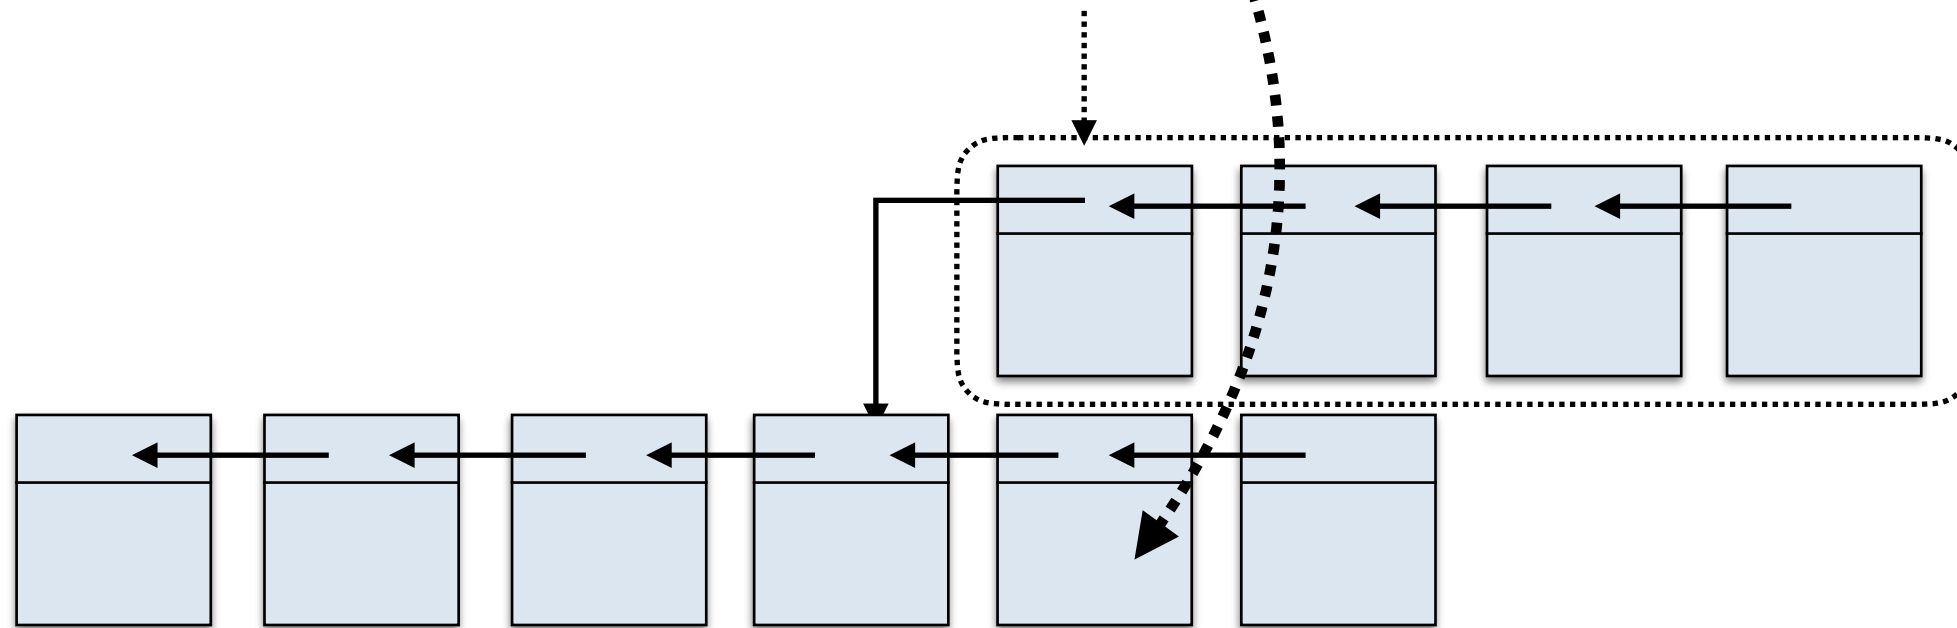

- When network switches to my fork, the banana transaction disappears.
- Free bananas! (Sorry Blase, see Step 2)

By some theories, such an attack requires 51% of total compute power.  
This has been disputed (both higher and lower).



# Bitcoin Gold Suffers a 51% Attack, Leads to Double Spend Problem



by [Aradhana S.](#)

| 2 minutes read

| Jan 30



Story from **Markets** →

## Why Exchanges List Small-Cap Coins Despite 51% Attacks

Feb 11, 2020 at 20:30 UTC • Updated Feb 11, 2020 at 21:07 UTC

# Blockchain Mining


- Current reward for mining a block is: About \$53,400 (12 BTC)
- Current setting for k in POW is: About 72
- Most compute power is in “Mining Pools”
- Currently, Bitcoin mining uses amount of electricity similar to the entire country of Bangladesh (by one estimate)

[News](#) > [Best ASIC devices for Bitcoin mining in 2018](#)

## Best ASIC devices for Bitcoin mining in 2018

By [Nate Drake](#) July 11, 2018 [Internet](#)

Mine like a pro with the latest ASIC hardware

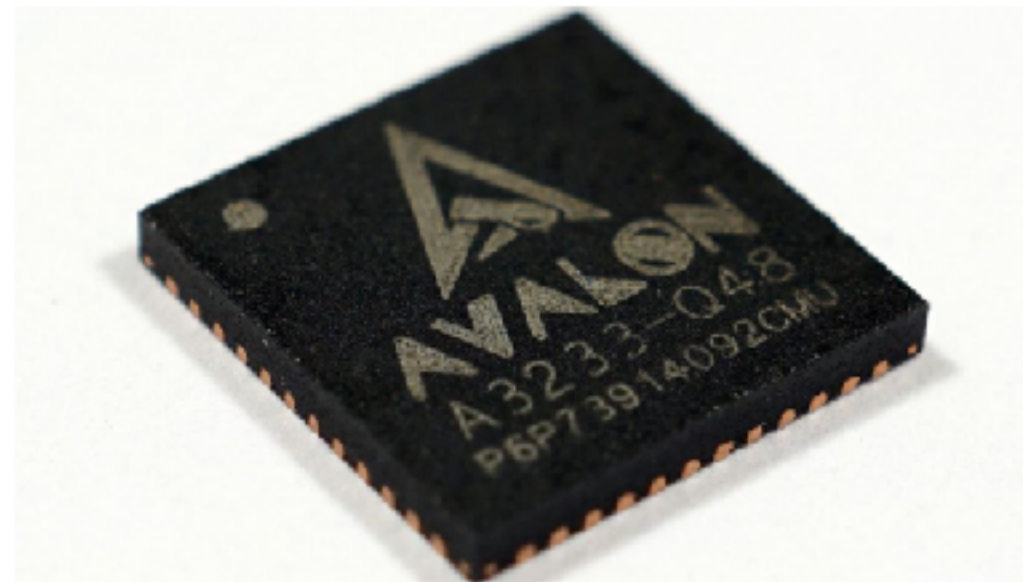

If you want to get started with mining your own [Bitcoin](#) (BTC), these days you need ASIC (application-specific integrated circuit) devices, which are specifically built for the purpose.



**bitcoin**

www.bitcoinworld.com

Free Home & Business Heating

- Website Development
- Mobile App Development
- Cyber Security
- Bitcoin POS
- Bitcoin Consulting

1923



# Zcash: Privacy via Zero-Knowledge Proofs



- If you can connect a Bitcoin public key to a person, then you can see their entire transaction history
- Zcash is an altcoin that addresses this:
  - When adding a block, network doesn't depend on blockchain history to check validity
  - Instead, you give a zero-knowledge proof that your transaction is valid, without revealing why



# Ethereum and “Smart Contracts”




ethereum

- In a simple blockchain, “Transactions” are just transfer amounts
- But instead one include scripts in “Transactions”, for example:
  - “Transfer 2 to Ben on Jan 1, 2019”
  - “Transfer 3 to Blase if the temperature is above freezing tomorrow”
  - “Transfer 1 to David if he sends software with hash=h to Ben by tonight”
- Blockchain history is still verifiable, so script rules are enforced by network.


# The Ethereum DAO

- Smartcontracts are code. They take inputs and produce outputs.
- Smartcontracts are “authoritative”: Their output is correct by definition.
- What could go wrong?

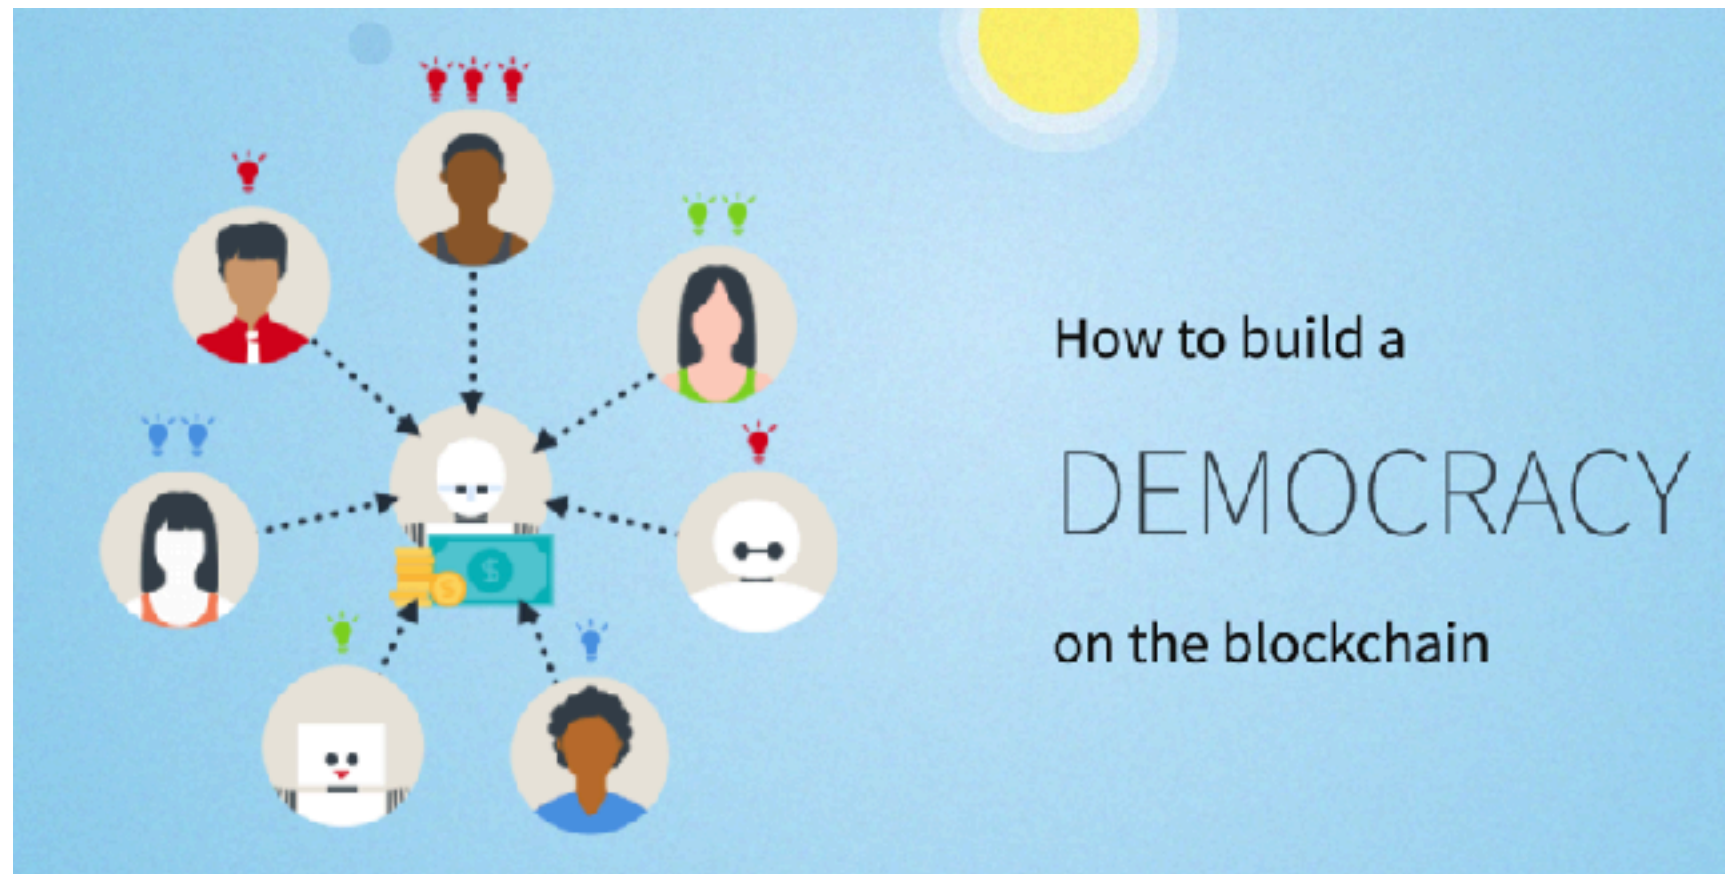


- “The DAO” is a smart contract that allows transfers into a fund, and then voting for how to invest the fund

# The DAO Hack

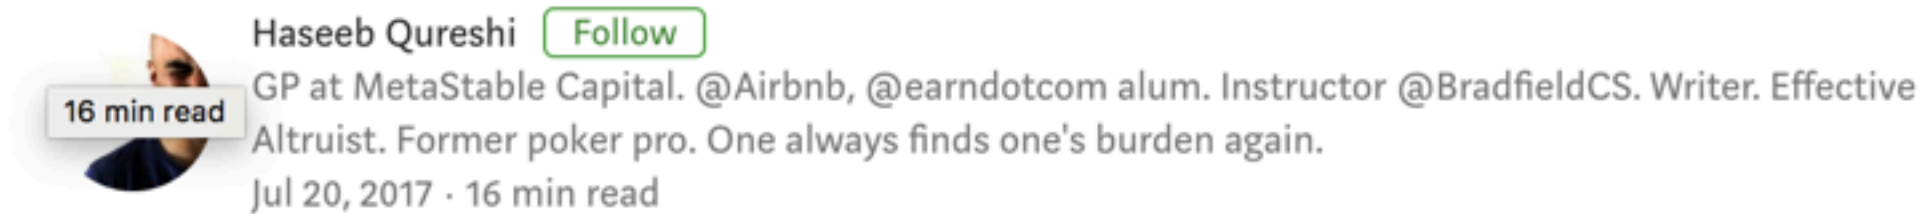


## A hacker stole \$31M of Ether—how it happened, and what it means for Ethereum



- Bug in the smartcontract code allowed hacker to transfer money out
- Hacker would have stolen more, but whitehats noticed and also exploited flaw, saving around \$150M more from being stolen

# The Fork (July 2016)

- Solution: Introduce a new smartcontract that undoes the theft, and get everyone to choose the fork including this smartcontract.
- Not allowed under the original rules; Some (10%) voted against the fork.
- Arguably undermines the point of smartcontracts (i.e. "Code is law.")

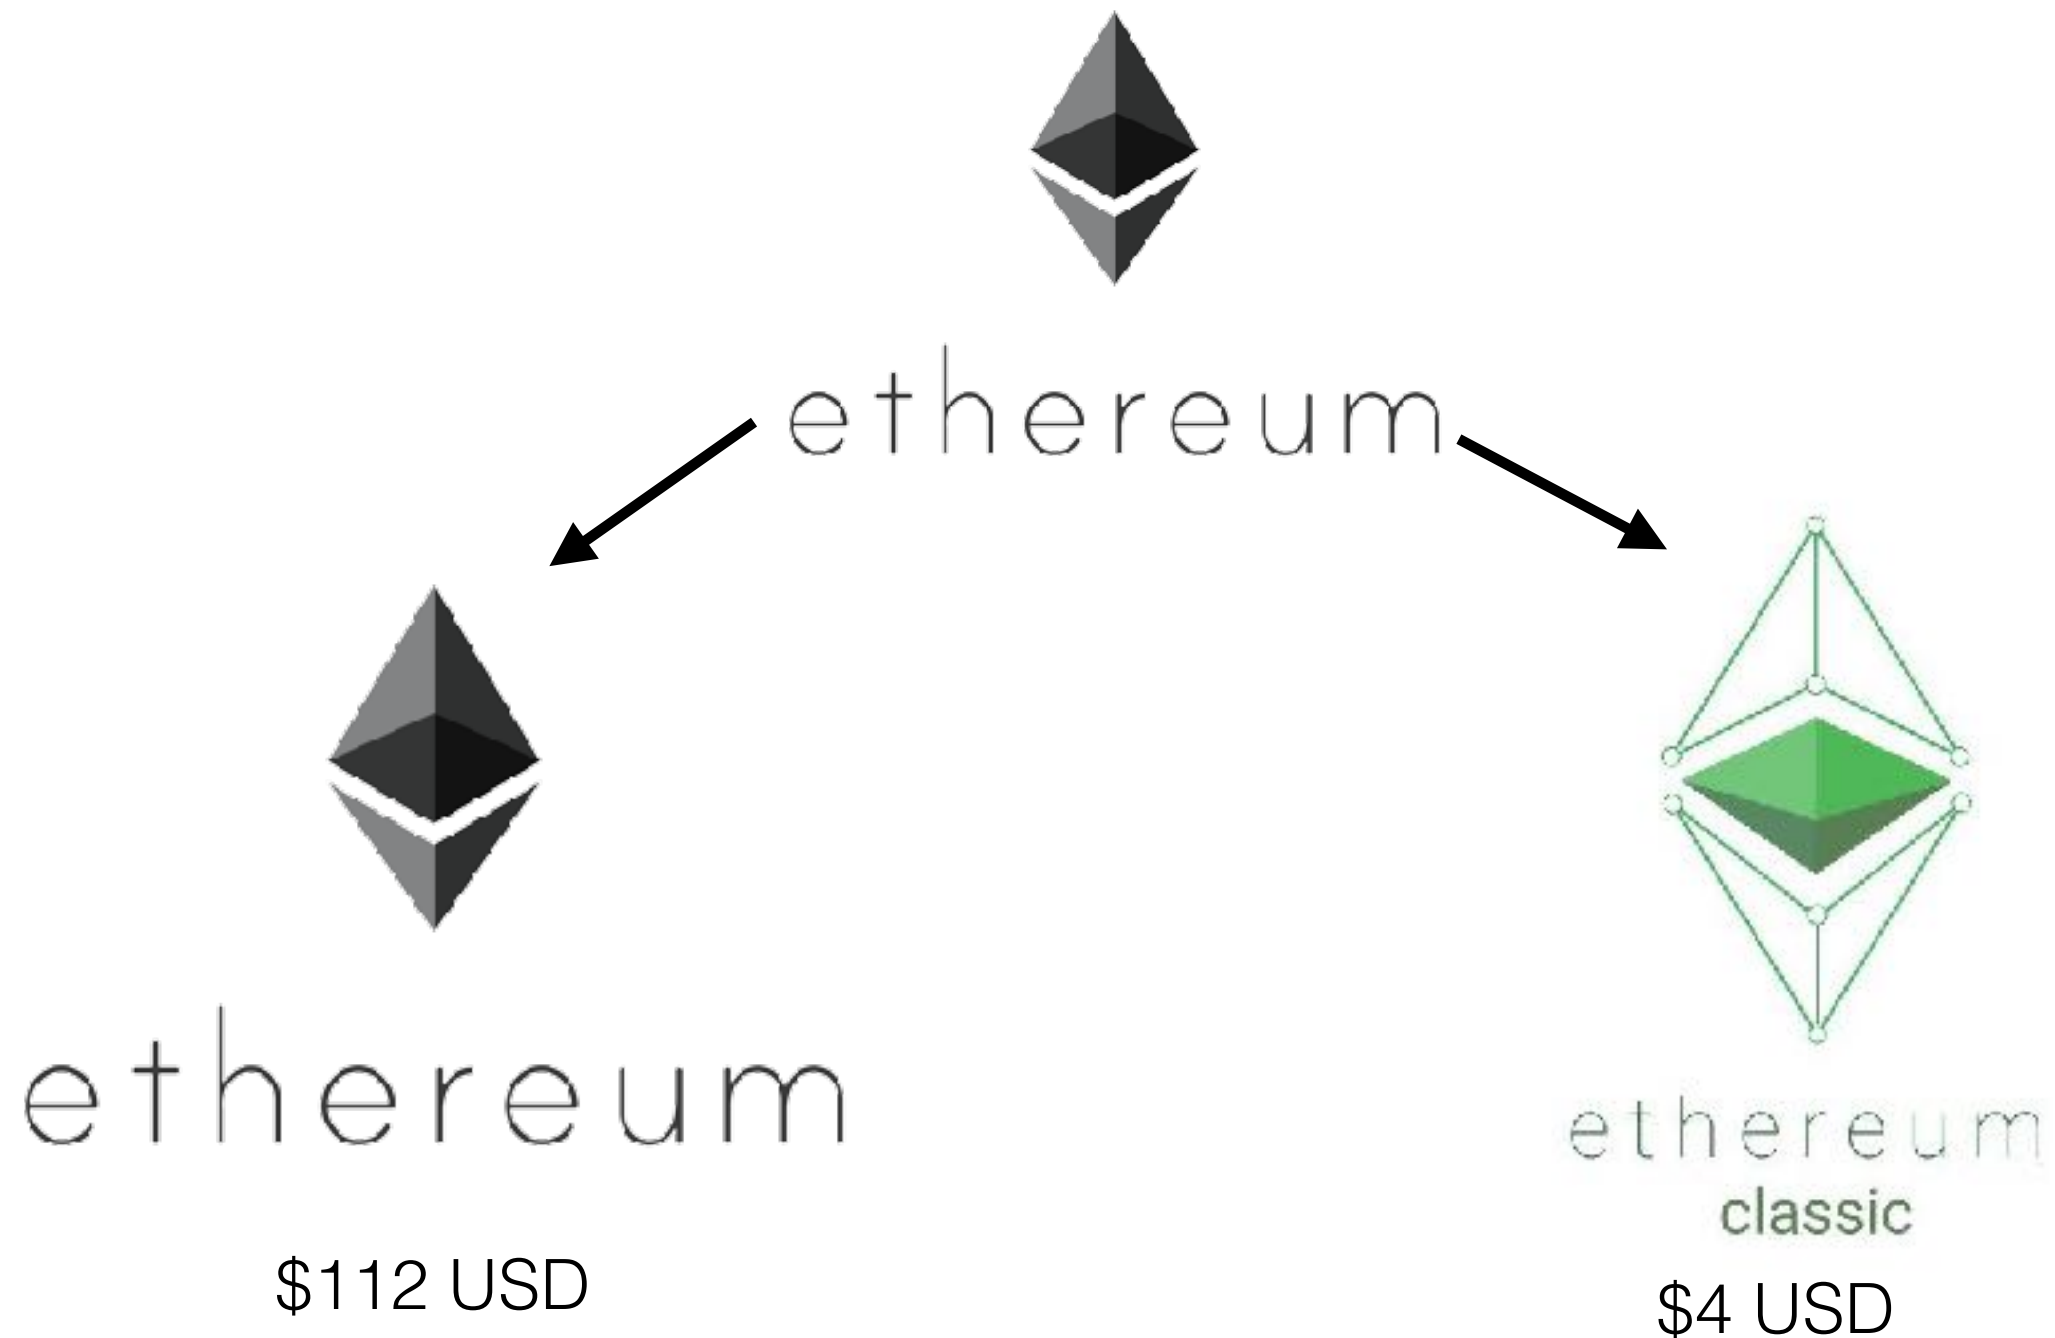



# Other Application of Bitcoin: Buying Drugs



- Silk Road was online market for drugs and other illegal products
  - Shut down in 2013, owner convicted and given life sentence
  - Bitcoins confiscated by FBI and auctioned off for \$48M (worth \$614M today)

# Other Application of Bitcoin: Ransomware



**BTC CRIME** AUGUST 02, 2018 07:45 CET

## SamSam Ransomware Makers Rake in \$6 Million in Bitcoin: Research

The End